

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 158(3) EPC

(43) Date of publication:
24.11.2004 Bulletin 2004/48

(51) Int Cl.7: **H04L 29/06**

(21) Application number: 02764488.9

(86) International application number:
PCT/CN2002/000596

(22) Date of filing: 28.08.2002

(87) International publication number:
WO 2003/065677 (07.08.2003 Gazette 2003/32)

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR
Designated Extension States:
AL LT LV MK RO SI

- LIU, Yue, Huawei Service Centre Bldg.
Shenzhen, Guangdong 518057 (CN)
- ZHONG, Kai, Huawei Service Centre Bldg.
Shenzhen, Guangdong 518057 (CN)
- YANG, Guangxian, Huawei Service Centre Bldg.
Shenzhen, Guangdong 518057 (CN)
- LIU, Kebin, Huawei Service Centre Bldg.
Shenzhen, Guangdong 518057 (CN)
- PENG, Kuncheng, Huawei Service Centre Bldg.
Shenzhen, Guangdong 518057 (CN)

(30) Priority: 30.01.2002 CN 02100445

(71) Applicant: Huawei Technologies Co., Ltd.
Guangdong, Shenzhen 518057 (CN)

(72) Inventors:
• ZHOU, Peng, Huawei Service Centre Bldg.
Shenzhen, Guangdong 518057 (CN)

(74) Representative: Mounteney, Simon James
MARKS & CLERK,
57-60 Lincoln's Inn Fields
London WC2A 3LS (GB)

(54) **SYSTEM AND IMPLEMENTATION METHOD OF CONTROLLED MULTICAST**

(57) A system and method for implementing controlled multicast, wherein comprises Ethernet switch 1, multicast router 2, as well as portal server 3 and AAA server 4 that connect with the multicast router, where Ethernet switch 1 connects with each hosts of user in a downlink, in an uplink connects with multicast router 5 and implements multicast switch of layer 2; portal server 3 is used as an interface for access authentication of the user, AAA server 4 is used to store configuration of user privilege for joining in a multicast group; multicast router 2 connects with multicast router 5 of other systems in the uplink, and cooperates together with AAA server 4 to completes privilege authentication for the user when he joins in the multicast group, distributes a control command according to results of the authentication, and controls forwarding of the multicast made by Ethernet switch 1. The method according to the present invention can resolve better the authenticated authorization and controlled problem of the sender and receiver joining in the multicast, and can identify the host joining in or leaving the multicast group expediently, actively stop the user's group member identification through offline without any influence on the forwarding efficiency.




Fig. 4

Description

Field of the Technology

[0001] The present invention relates generally to an IP multicast technique, and more particularly, to an IP controlled multicast system and thereof implementation method in a telecommunication technological field.

Background of the Invention

[0002] Along with maturation of the IP multicast technique, application of the IP multicast is becoming increasingly widespread. However, in an IP model, any host can join into any of the multicast groups without limitation, and until now, there are no effective methods that can solve the controlled join problem of a host in an IP multicast network.

[0003] It is well known that, in the IP multicast model, a multicast group comprises senders and receivers, which are connected with a multicast Distribution Tree. When the sender needs to send data to a certain group, the host will transmit the data directly to the multicast router which connects with the host, and the multicast router then forwards the data to the multicast receiver via the multicast Distribution Tree without any limitation on the host that sends messages. As soon as a host wants to get data from a certain multicast group, the host sends a Member report message to its connected multicast router according to an Internet Group Management Protocol (IGMP for short), and the multicast router will then forward the data of the multicast group to the host after the Member report message is processed; similarly, the multicast router will not make any limitations on the host which wants to obtain the multicast message. With the development of commercialization in IP multicast application, multicast security has become an urgent problem that should be solved as soon as possible, a key of which is prohibiting unauthorized receivers to receive the multicast messages.

[0004] Norihiro Ishikawa et al proposed an IGMP extension protocol "IGMP Extension for Authentication of IP Multicast" (published at draft-ietf-idmr-igmp-auth-01.txt) and a RADIUS extension protocol "RADIUS Extension for Multicast Router Authentication", (where, the RADIUS is abbreviation of Remote Authentication Dial in User Service, which is published at draft-yamanouchi-RADIUS-ext-00.txt), with which authentication for the sender and the receiver can be made.

[0005] The IGMP extension protocol above is extension made based on an IGMP V2 (version 2), in which authentication function for the multicast sender and the multicast receiver is added, to prevent unauthorized users from sending/receiving multicast packets. The IGMP extension protocol adopts a Challenge-Response mechanism that is similar with a PPP authentication protocol CHAP (Challenge Handshake Authentication Protocol) such as thrice handshakes, encrypted password

to make user authentication. Once a multicast sender begins to transmit IP multicast messages, an ingress router may make authentication for it with the challenge-response mechanism. The ingress router may utilize a RADIUS as an authentication server during the authentication process. When the authentication is successful, the multicast packets from the sender will be forwarded by the ingress router to the IP multicast network and then to an Egress router. When the authentication is failed, the ingress router will discard the multicast packets silently. Authentication made by the Egress router is needed when the multicast receiver wants to receive IP multicast messages. The Egress router may also adopt the RADIUS as the authentication server during the authentication process. Once the authentication succeeds, the Egress router begins to transmit the IP multicast packets to the receiver; otherwise, no IP packets will be forwarded to the receiver.

[0006] The RADIUS extension protocol above is extension made in the basis of the RADIUS, which may make authentication for the multicast sender and the multicast receiver at the ingress router and the Egress router, and track multicast data of the user to provide data for service management. The authentication server must be able to provide the authentication service required by the multicast router, meanwhile, the multicast router might provide identification (User ID) and password of the user. In order to insure security, authentication process must be based on the challenge, and every service must be authenticated, for instance, authentication must be made on the address of each multicast group. The reason is that multicast packets are transmitted according to the group address, and the authority of the user should be correlative with the group. Except for some additional attributes, other requirements are just the same with that of the RADIUS. Whether or not the multicast router makes RADIUS authentication is optional.

[0007] When being configured to support RADIUS charging, the multicast router will generate a charging start message at the beginning of the multicast service, and send to a RADIUS multicast charging server, wherein the message describes type of the service. After receiving the charging start message, the RADIUS multicast charging server will return a confirmation message. When the multicast service is completed, the multicast router also generates a charging end message, and sends the message to the RADIUS multicast charging server. After receiving the message, the RADIUS multicast charging server will also return a confirmation message, wherein the charging end message describes type of the service.

[0008] After receiving an IGMP Join request, the multicast router sends an Access-Request message to a RADIUS multicast authentication server to ask for authentication. After receiving a response from the RADIUS multicast authentication server that indicates the authentication is successful, the multicast router sends an

Account-Request/Start message to the RADIUS multi-
 cast charging server to start charging. While receiving
 an IGMP Leave request, the multicast router may send
 an Account-Request/Stop message to the multicast
 charging server to terminate the charging. If no re-
 sponse is returned to the multicast router within certain
 period of time, the RADIUS extension protocol advises
 the multicast router to resend the Access-Request mes-
 sage several times continuously. The multicast charging
 server can also ask other servers (such as a proxy ser-
 ver) to implement the charging function. While being un-
 able to record charging message successfully, the mul-
 ticast charging server cannot send an Accounting-Re-
 sponse confirmation message to the multicast router.
 [0009] Moreover, CISCO Inc develops a CISCO
 Group Management Protocol (named CGMP for short),
 which is used for solving a multicast forward flooding
 problem under circumstance of an Ethernet switch; with
 the CGMP, a layer 3 equipment can control a forwarding
 table of a layer 2 equipment, which provides a mean to
 control authorized reception in a certain extent. As
 shown in Fig.1, CGMP message is composed by
 number of edition (Ver, 4 bits), Type (4 bits), Reserved
 port (2 bytes), number of GDA/USA pairs in the mes-
 sage (Count, 1 byte) and several GDA/USA pairs.
 Wherein, the GDA (Group Destination Address) is a
 MAC multicast address that corresponds to an IP ad-
 dress of the multicast group that the host wants to join
 in; the USA (Unicast Source Address) is a MAC address
 of the host which wants to join in the multicast group and
 is a unicast address.

[0010] As shown in Fig.2, process of the CGMP is as
 follows. Host 1 sends an IGMP Membership Report
 message to join in multicast group 224.1.2.3; the switch
 uses MAC address 0100.5e01.0203 that corresponds
 to the address of multicast group resolved from the
 message to search its matching terms in a CAM (CAM:
 Content-Addressable Memory) table; because there is
 no its matching terms in the CAM table, the message is
 forwarded (flooding) to all the ports, including a CPU and
 multicast routers. Wherein, after receiving the IGMP
 Membership Report message, the multicast router, be-
 sides implementing routine disposal, produces a CGMP
 Join message and multicasts to the switch, which com-
 prises the MAC address (USA: 0080.c7e2.1093) of the
 host which applies to join in the multicast group, the
 MAC address (GDA: 0100.5e01.0203) of the multicast
 group which is applied to join in, as well as a Join com-
 mand field. After receiving the CGMP Join message, the
 switch may add an entry in the CAM table, which in-
 cludes the GDA (0100.5e01.0203 in the drawings), the
 port number (marked as 2 in the drawings) of the host
 which wants to join in the multicast group, and the port
 number (marked as 1 in the drawings) of the multicast
 router that connects with the switch. Wherein, the port
 number of the host is obtained through searching the
 USA.

[0011] As shown in Fig.3, when the fourth host 4 joins

In multicast group 224.1.2.3, it will similarly send the
 IGMP Membership Report message to the switch; after
 having resolved the IP address of the destination group
 is 224.1.2.3, the switch may find the entry after search-
 ing in the CAM table with the corresponding MAC ad-
 dress 0100.5e01.0203 of the IP address, and forward
 the message to port 1 and 2 (which are the multicast
 router and host 1 respectively) listed in the entry. After
 receiving the IGMP Membership Report message, be-
 sides making routine disposal, the multicast router pro-
 duces a CGMP Join message and multicasts to the
 switch, which comprises the MAC address of the host
 which applies to join in the multicast group (USA:
 0080.c7b3.2174) and the MAC address (GDA:
 0100.5e01.0203) of the multicast group which is applied
 to join in, as well as the Join command field. After re-
 ceiving the CGMP Join message, the switch may obtain
 an entry through searching in the CAM table with GDA,
 end get port number 5 of host 4 via searching in the CAM
 table with USA, meanwhile add port number 5 into the
 entry.

[0012] Although the Synergic extension method be-
 tween the IGMP and the RADIUS above has solved the
 authorization problems for the sender and the receiver,
 some shortcomings still exist.

(1) Once a host join in the multicast group success-
 fully in a shared network, all the other hosts will be
 able to receive the multicast data, which means, it
 is impossible to prevent the unauthorized hosts
 from receiving the multicast data. If a key method
 is adopted to solve the problem, distribution of keys
 before authentication for each host will bring numer-
 ous limitations and troubles.

(2) If both these two protocols are adopted, it is nec-
 essary not only to renew the multicast router equip-
 ment, but also to modify IGMP software in the host
 side. Furthermore, none of these two protocols is
 standardized; the present hosts don't support the
 IGMP extension.

[0013] Defects of the CGMP means of CISCO inc can
 be noticed as follows.

(1) No relation between forwarding control on the
 layer 2 switch controlled by the multicast router and
 authorized reception of the host/user is provided,
 end no authenticating and authorizing method for
 the user to join in the multicast group is provided
 either, all the control methods provided are a control
 method for the multicast message of the layer 2
 switch flooding at its port.

(2) The multicast router cannot detect "Silent
 Leave" of the host/user.

Summary of the Invention

[0014] It is an object to provide a controlled multicast

system, in order to provide application environment for a controlled multicast method of the invention.

[0015] It is another object to provide the method for implementing controlled multicast, in order to solve multicast disadvantages of the prior arts, which include synergic method between the IGMP extension and the RADIUS extension, and the CGMP of CISCO Inc; at the same time, the method can preferably solve problems of authorization authentication and controlled join of the sender and receiver which participate in the multicast.

[0016] A controlled multicast system, including an Ethernet switch and a multicast router, wherein, the Ethernet switch connects with each host of a user in a down-link, connects with the multicast router in an uplink, the multicast router connects with a multicast router of other systems in the uplink, the Ethernet switch implementing multicast exchange of a layer 2, an IGMP V2 protocol is adopted as group management protocol between the Ethernet switch and the host of the user; the controlled multicast system further comprises: a portal server and an AAA server that connect with the multicast router; the portal server acting as an interface of user access authentication, the AAA server being used for storing configuration of privilege for the user to join in a multicast group; the multicast router cooperating with the AAA server together to implement privilege authentication for the user to join in the multicast group, and distributing control commands according to results of the authentication to control multicast forwarding operations of the Ethernet switch.

[0017] A RADIUS+ protocol extended from an AAA protocol is adopted as communication protocol between the multicast router and the AAA server; a group management protocol HGMP (Huawei Group Management Protocol) is used as a control protocol between the Ethernet switch and the multicast router.

[0018] A method for implementing a controlled multicast, comprises: implementing access authentication first; then an Ethernet switch classifying a vian according to a port and handling an IGMP message from a host, implementing user identification, authentication for joining in a multicast group, and a multicast router handling the IGMP message; in succession, the multicast router controlling the Ethernet switch for multicast forwarding, between which a HGMP protocol is used as a control protocol of the controlled multicast; after that, the Ethernet switch disposing a HGMP control message and forwarding a multicast flow; the host leaving the multicast group and making corresponding processes after finishing the forwarding operation.

wherein the step of implementing access authentication comprises,

(1) when accessing a network, the host inputting on authentication information that includes a User ID and a password first through an interface provided by a portal server, and a AAA server authenticating identification of the host with the information; once

the authentication is successful, the multicast router recording the User ID and a corresponding vian ID of the host in a multicast access privilege table of the user;

the step of the Ethernet switch classifying the vian according to the port and handling the IGMP message from the host comprises,

(2) classifying the vian according to the ports, with one vian for each port, and linking one port to one host; searching a Content-Addressable Memory (CAM) table with a destination MAC address of the IGMP message sent by the host and forwarding the said IGMP message, of which forwarding process is same with that of a unicast message: if the port corresponding to the destination MAC address is found, forwarding the multicast message to the port, otherwise forwarding the multicast message to all the ports;

the step of implementing user identification, authentication for joining in the multicast group, and handling the IGMP message by the multicast router comprises,

(3) after receiving an IGMP Membership Report message, according to the vian ID in the message, the multicast router finding the corresponding User ID and the host to which the IGMP Membership Report message belongs through searching in the multicast access privilege table of the user recorded in step (1), and then sending an extended RADIUS authentication message which includes the User ID just found as the user name and the address of multicast group in which the host wants to join as an attribute, to the AAA server for authentication;

the AAA server determining whether to accept the user based on services of the user; if the user has the suitable privilege, responding with an acceptance message, otherwise returning a reject message; after receiving the reject message, the multicast router do nothing, but if receiving the acceptance message, the multicast router writing the address of the multicast group in which the user can join into the multicast access privilege table of the user, and implementing a routine dispose on join messages of the host, then generating and transmitting a HGMP Join message to the Ethernet switch, which comprises the vian ID corresponding to the port that links with the host which wants to join in the multicast group, the address of the multicast group that is applied for, and a Join command field; moreover, the multicast router also completing a routine processing of creating multicast forwarding tree on the IGMP Membership Report message just like an ordinary multicast router does;

the step of the multicast router controlling the Ethernet switch making the multicast forwarding with the HGMP protocol being control protocol of the controlled multicast comprises,

(4) managing generation and deletion of an entry in

the CAM table at the Ethernet switch by the multicast router; while allowing the host to join in the multicast group, the multicast router sending the HGMP Join message that includes the vian ID of the host which applies to join in the multicast group and the address of the multicast group applied for to the Ethernet switch; when the multicast router wants to terminate the host joining in the multicast group, the multicast router transmitting a HGMP Leave message which comprises the vian ID of the host which leaves the multicast group and the address of the multicast group where the host leaves;

the step of the Ethernet switch disposing the HGMP control message comprises,

(5) after receiving the HGMP Join message, the Ethernet switch searching the CAM table with the MAC address corresponding to the address of the multicast group; if the entry corresponding with the address is found, the Ethernet switch obtaining the port number of the host via the vian ID in the HGMP Join message, and then adding the port number into the said entry; if nothing is found, adding an entry in the CAM table, which comprises the MAC address corresponding to the multicast address, the port number of the host which applies to join in the multicast group, and the port number of the multicast router connected with the Ethernet switch;

after receiving the HGMP Leave message, the Ethernet switch obtaining the entry through looking up the CAM table with the MAC address corresponding to the multicast address of the multicast group, and getting the port number of the host through the vian ID, and then deleting the said port number from the said entry, if the said port number is the solely port of the said entry, deleting the whole entry;

the step of forwarding of the multicast flow comprises,

(6) when receiving the multicast flow sent from the multicast source, the multicast router forwarding the multicast flow to an egress based on a CAM table; when handling the IGMP Membership Report message of the host, the multicast router creating a multicast forwarding egress according to the real port of the Ethernet switch, and sending only one copy of the multicast flow to the Ethernet switch;

the step of the host leaving the multicast group comprises,

(7) after finishing the multicast end wanting to leave the multicast group, the host sending an IGMP Leave message; after receiving the IGMP Leave message, the multicast router extracting the vian ID from the message, and obtaining corresponding entry via searching in the multicast access privilege table created in step (1) with the vian ID, then deleting the address of the multicast group indicated by the IGMP Leave message in the entry; after completing a routine disposal on leave messages, the

multicast router generating the HGMP Leave message and sending to the Ethernet switch, which includes the vian ID of the host which wants to leave group, the address of multicast group where the host wants to leave and a Leave command field.

wherein the CAM table and the unicast forwarding table of the Ethernet switch are shared.

wherein, during the messages forwarding, adopting a vian protocol between the port of the multicast router and the Ethernet switch.

in step (6) there is no vian ID in a multicast data packet of the multicast flow sent from the multicast router.

In step (7) of leaving from the multicast group can also be implemented via following means which comprises, once the multicast router knows offline status of the user, the multicast router actively sending the HGMP Leave message to terminate multicast flow transmission to the host, which is same with that of processing on the IGMP Leave message.

[0019] The method further comprises controlling the multicast sender, which includes when the host transmits data to the multicast group, the first receiver among the multicast routers filtering the data message with a multicast Access Control List (ACL), and forwarding the data message that satisfies the requirements in the ACL to the multicast tree.

wherein the multicast ACL comprises a command word, a source address and a group address.

wherein the multicast ACL is distributed to each multicast router by a centralized multicast service control server; the step of controlling the sender is accomplished with the multicast ACL by the multicast router, meanwhile the multicast service control server is also acts as the AAA server.

wherein the multicast ACL can also be distributed by a centralized policy server or a network manager.

[0020] The main advantages of the present invention are as following. The method provides an effective technical means for authenticated authorization when the user join in the multicast group, in order to ensure that only the authorized user can join in the multicast group; through one-to-one relationship among the port, the user and the vian ID, together with access authentication for the user, the user who joins in or leaves the multicast group can be easily identified. The multicast router can make the active and decisive control on the multicast forwarding function of the layer 2 switch, and distribute its control policy to the Ethernet switch, which can preferably solve the controlled problems in the IP multicast service. Secondly, when the host leaves the multicast group without sending the IGMP Leave message, for instance, when multicast application program terminates abnormally, the group membership can be actively terminated through offline of the user. What is more, there is no influence on forwarding efficiency after introduction of the control means according to the present invention.

The method in the present invention has a splendid application future.

Brief Description of the Drawings

[0021]

Fig.1 is a schematic diagram of the CGMP message format in the prior art.

Fig.2 is a schematic diagram illustrating flow direction of the signal that host 1 first joins in multicast group 224.1.2.3 in process of the CGMP in the prior art.

Fig.3 is a schematic diagram illustrating flow direction of the signal that host 4 second joins in multicast group 224.1.2.3 in process of the CGMP in the prior art.

Fig.4 is a schematic diagram illustrating the system structure of the controlled multicast system according to the present invention.

Fig.5 is a schematic diagram illustrating flow direction of the signal while making access authentication for host 1 in the controlled multicast according to the present invention.

Fig.6 is a schematic diagram illustrating flow direction of the signal that host 1 first joins in multicast group 224.1.2.3 in the controlled multicast according to the present invention.

Fig.7 is a schematic diagram illustrating flow direction of the signal that host 4 second joins in multicast group 224.1.2.3 in the controlled multicast according to the present invention.

Fig.8 is a schematic diagram illustrating flow direction of the signal with which the multicast router forwards the multicast flow in the controlled multicast according to the present invention.

Fig.9 is a schematic diagram illustrating flow direction of the signal that indicates host 1 leaves multicast group 224.1.2.3 in the controlled multicast according to the present invention.

Fig.10 is a schematic diagram illustrating the centralized control scheme in the controlled multicast system according to the present invention.

Embodiments of the invention

[0022] The present invention will be described in more detail hereinafter with reference to the accompanying drawings.

[0023] Now refer to Fig.4. The invention provides the controlled multicast system that includes Ethernet switch 1 and multicast router 2, wherein Ethernet switch 1 connects with each hosts of the user in the downlink, and in the uplink with multicast router 2 which further connects with multicast router 5 of other systems; the IGMP V2 (version 2) protocol is used as group management protocol between the host and the Ethernet switch who implements multicast exchange of layer 2. The con-

trolled multicast system further comprises: portal server 3 and AAA server 4 that connect with multicast router 2, wherein, portal server 3 is used as the interface of access authentication for the users, AAA server 4 is used for storing Privilege configuration of the users who want to join in the multicast group, a Client-server structure is adopted between AAA server 4 and multicast router 2, and the multicast router 2, together with AAA server 4, makes authentication for the privilege of users who want to join in the multicast group, and distributes control orders according to results of the authentication, in order to control forwarding operation of the multicast made by Ethernet switch 1. In the invention, the RADIUS+ protocol that is extended from the standard RADIUS protocol is adopted as communication protocol between multicast router 2 and AAA server 4, meanwhile, the group management protocol HGMP is used as control protocol between Ethernet switch 1 and multicast router 2.

[0024] The implementing method and operational steps of the complete process for the host joining in the multicast group according to the present invention will be described in more detail hereinafter with reference to the accompanying drawings from Fig.5 to Fig.10 and an embodiment.

[0025] As shown in Fig.5, when a certain host (supposing host 1) wants to access the network, first the host must make authentication through the interface provided by the portal server; the AAA server is an authentication server. The User ID in the pane at right side of the AAA server in the drawing represents the user name input by the user while making authentication, and group represents address of the multicast group in which the user wants to join. The Ethernet switch (LAN Switch) classifies the vian according to the ports, each of which connects with one user. Wherein port 1 links the multicast router, and the ports from 2 to 5 connect each host from 1 to 4 respectively. Once the authentication is successful, the multicast router will record the User ID of host 1 (i.e. host 1) and the corresponding vian number (i.e. vian 1) of host 1 (here, assume the user name in a user account of host 1 is host 1).

[0026] As shown in Fig.6, when host 1 wants to join in the multicast group (assuming the group 224.1.2.3), the host may send the IGMP Membership Report message to join in multicast group 224.1.2.3; the Switching Engine searches in the CAM table with the destination MAC address 0100.5e01.0203 in the message; because there is no matching terms in the CAM table, the message is forwarded (flooding) to all the ports, including the CPU and the multicast router; wherein, according to receiving ports, the message that is forwarded to the multicast router will be attached with the vian number (in case of host 1, it is vian 1).

[0027] After receiving the IGMP Membership Report message, the multicast router extracts the vian ID (vian 1) from the message, with which obtaining the User ID (host 1) corresponding to the user; the multicast router

appoints the found User ID as the user name, making the address (224.1.2.3) of multicast group in which the host wants to join as its attribute, sending the extended RADIUS authentication message to the AAA server for authentication; the AAA server determines whether to accept the user according to the service that he applied for. If the user has a certain privilege, the multicast router may response with the acceptance message, otherwise send the reject message as response. In case of receiving the reject message, the multicast router will do nothing; once the received message is the acceptance message, the multicast router will record the address of the multicast group where the user can join into the multicast access privilege table of the user, and make the routine process of the multicast router on the message, then generate and transmit the HGMP Join message to the switch, which comprises the vian number (vian 1) of the host which applies to join in the multicast group, the address (224.1.2.3) of the multicast group in which the host applies to join, and the Join command field.

[0028] After receiving the HGMP Join message, the switch will add an entry in the CAM table, which comprises the MAC address (0100.5e01.0203) that is corresponding to the multicast address (224.1.2.3), port number (2) of the host which applies to join in the multicast group and port number (1) of the multicast router that connects with the switch. Wherein, the port number of the host is obtained through searching in a table with the vian ID.

[0029] Now refer to Fig.7. When other new host (assume the fourth host 4) joins multicast group 224.1.2.3 (assume the host has already passed the access authentication in the same way with that of host 1 in the first step), and also sends the IGMP Membership Report message to the switch, the Switching Engine finds the entry via searching in the CAM table with the destination MAC address 0100.5e01.0203, and then sends the message to port 1 and 2 (i.e. the multicast router and host 1) listed in the entry.

[0030] After receiving the IGMP Membership Report message, the multicast router extracts the vian ID (vian 4) from the message, with which the multicast router finds the User ID (host 4) corresponding to the user through searching in the multicast access privilege table, and then appointing the User ID as the user name, the address (224.1.2.3) of the multicast group where the host wants to join as its attribute, finally transmits the extended RADIUS authentication message to the AAA server for authentication; the AAA server will determine whether to accept the user according to the service he applied for. If the user has a certain privilege, the multicast router may response with the acceptance message, otherwise send the reject message as response. In case of receiving the reject message, the multicast router will do nothing; once the received message is the acceptance message, the multicast router will write the address of the multicast group in which the user can join into the multicast access privilege table of the user, and

make routine process of the multicast router on the join message of the host, then generate and transmit the HGMP Join message to the switch, which includes the vian number (vian 4) of the host which applies to join in the multicast group, the address (224.1.2.3) of the multicast group in which the host applies to join, and the Join command field.

[0031] After receiving the HGMP Join message, the switch will search in the CAM table with the MAC address (0100.5e01.0203) that corresponding to the address (224.1.2.3) of the multicast group; because there exists the entry in the CAM table after host 1 have joined the group 224.1.2.3 in the above step as shown in Fig. 6, the same entry that is identical with the result of last search will be obtained; the port number of the host (5) will be added in the entry after the port number 5 is obtained through searching in the CAM table with the vian ID.

[0032] As shown in Fig.8, when the multicast router receives the multicast flow sent from the multicast source, the multicast flow will be forwarded to the egress according to the CAM table. Because the multicast router creates the multicast forwarding egress based on the real ports of the switch rather than the vian number when handling the IGMP Membership Report message of the host, the switch connected with the multicast router has only one egress in the CAM table, and only one copy of the multicast flow is transmitted to the switch, without the vian ID in the multicast data packet.

[0033] As shown in Fig.9, once wanting to leave multicast group 224.1.2.3, host 1 may send the IGMP Leave message to the switch; in the Fig.9, what corresponds to the IGMP Leave message sent by host 1 is the arrow drawn from host 1, and the Switching Engine searches in the CAM table with destination MAC address 0100.5e01.0203; after finding the entry, the Switching Engine will transmit the message to the ports listed in the entry: 1 and 5 (i.e. the multicast router and host 4).

[0034] After receiving the IGMP Leave message of the member, the multicast router extracts the vian ID (vian 1) from the message, and obtains the corresponding entry through searching in the multicast access privilege table with the vian ID, then deletes multicast address 224.1.2.3 indicated by the IGMP Leave message in the entry as shown in Fig.9; i.e. after deleting address 224.1.2.3 in the multicast group column (group) in the pane at right side of the multicast router, where the user who corresponds to vian 1 has right to join in, the multicast router completes the routine disposal on the leave message of the member; then generates and sends the HGMP Leave message to the switch; in the Fig.9, what corresponds to the HGMP Leave message is the downwards arrow drawn from the multicast router, the message comprises the vian number of the host (vian 1) which wants to leave the multicast group and the multicast address (224.1.2.3) that will be departed as well as the Leave command field.

[0035] After receiving the HGMP Leave message, the

switch may obtain the entry through searching in the CAM table with MAC address 0100.5e01.0203 that corresponds to multicast address 224.1.2.3, and get port number 2 of the host which sends the IGMP Leave message through searching with the vlan ID, and delete the port number 2 from the entry.

[0036] The steps above describe the detailed control processes on the multicast members of the controlled multicast method according to the present invention, moreover, the above method also comprises relevant control on the multicast sender as shown in Fig.10. When the host (which is message resources (IDC) in Fig.10) transmits data to a certain multicast group, the multicast router which receives the data in first place will download the multicast ACL (Access Control List, ACL for short) first via the multicast service control server, and filter the data message with the multicast ACL, only the messages that satisfy the requirements can be forwarded to the Multicast Tree. Wherein, the multicast ACL is composed of the command word, the source address and the group address which is a destination address either. In order to avoid disadvantages caused by the discrete configuration, the centralized multicast service control server is usually adopted to distribute the multicast ACL to each multicast router which further controls the functions of senders; at same time, the multicast service control server also acts as the AAA server, of course, the multicast ACL can also be distributed by the centralized policy server or the network manager.

[0037] The above system and method for implementing controlled multicast have been experimented in several apparatus designed by the applicant, the results are very successful, and the destination of control over the multicast is realized according to the present invention.

Claims

1. A controlled multicast system, including an Ethernet switch and a multicast router, where the Ethernet switch connects with each host of a user in a downlink, connects with the multicast router in an uplink, the multicast router connects with a multicast router of other systems in the uplink, the Ethernet switch implementing multicast exchange of a layer 2, an IGMP V2 protocol is adopted as group management protocol between the Ethernet switch and the host of the user; wherein the controlled multicast system further comprises: a portal server and an AAA server that connect with the multicast router; the portal server acting as an interface of user access authentication, the AAA server being used for storing configuration of privilege for the user to join in a multicast group; the multicast router cooperating with the AAA server together to implement privilege authentication for the user to join in the multicast group, and distributing control commands according to results of the authentication to control multicast forwarding operations of the Ethernet switch.

warding operations of the Ethernet switch.

2. The controlled multicast system according to claim 1, a RADIUS+ protocol extended from an AAA protocol is adopted as communication protocol between the multicast router and the AAA server; a group management protocol HGMP (Huawei Group Management Protocol) is used as a control protocol between the Ethernet switch and the multicast router.
3. A method for implementing a controlled multicast, comprises: implementing access authentication first; then an Ethernet switch classifying a vlan according to a port and handling an IGMP message from a host, implementing user identification, authentication for joining in a multicast group, and a multicast router handling the IGMP message; in succession, the multicast router controlling the Ethernet switch for multicast forwarding, between which a HGMP protocol is used as a control protocol of the controlled multicast; after that, the Ethernet switch disposing a HGMP control message and forwarding a multicast flow; the host leaving the multicast group and making corresponding processes after finishing the forwarding operation.
4. The method according to claim 3, wherein the step of implementing access authentication comprises,

(1) when accessing a network, the host inputting an authentication information that includes a User ID and a password first through an interface provided by a portal server, and a AAA server authenticating identification of the host with the information; once the authentication is successful, the multicast router recording the User ID and a corresponding vlan ID of the host in a multicast access privilege table of the user;

the step of the Ethernet switch classifying the vlan according to the port and handling the IGMP message from the host comprises,
(2) classifying the vlan according to the ports, with one vlan for each port, and linking one port to one host; searching a Content-Addressable Memory (CAM) table with a destination MAC address of the IGMP message sent by the host and forwarding the said IGMP message, of which forwarding process is same with that of a unicast message; if the port corresponding to the destination MAC address is found, forwarding the multicast message to the port, otherwise forwarding the multicast message to all the ports;

the step of implementing user identification, authentication for joining in the multicast group, and handling the IGMP message by the multicast router comprises,

(3) after receiving an IGMP Membership Report message, according to the vlan ID in the message, the multicast router finding the corresponding User ID and the host to which the IGMP Membership Report message belongs through searching in the multicast access privilege table of the user recorded in step (1), and then sending an extended RADIUS authentication message which includes the User ID just found as the user name and the address of multicast group in which the host wants to join as an attribute, to the AAA server for authentication;

the AAA server determining whether to accept the user based on services of the user; if the user has the suitable privilege, responding with an acceptance message, otherwise returning a reject message; after receiving the reject message, the multicast router does nothing, but if receiving the acceptance message, the multicast router writing the address of the multicast group in which the user can join into the multicast access privilege table of the user, and implementing a routine disposal on join messages of the host, then generating and transmitting a HGMP Join message to the Ethernet switch, which comprises the vlan ID corresponding to the port that links with the host which wants to join in the multicast group, the address of the multicast group that is applied for, and a Join command field; moreover, the multicast router also completing a routine processing of creating multicast forwarding tree on the IGMP Membership Report message just like an ordinary multicast router does;

the step of the multicast router controlling the Ethernet switch making the multicast forwarding with the HGMP protocol being control protocol of the controlled multicast comprises, (4) managing generation and deletion of an entry in the CAM table at the Ethernet switch by the multicast router; while allowing the host to join in the multicast group, the multicast router sending the HGMP Join message that includes the vlan ID of the host which applies to join in the multicast group and the address of the multicast group applied for to the Ethernet switch; when the multicast router wants to terminate the host joining in the multicast group, the multicast router transmitting a HGMP Leave message which comprises the vlan ID of the host which leaves the multicast group and the address of the multicast group where the host leaves;

the step of the Ethernet switch disposing the HGMP control message comprises, (5) after receiving the HGMP Join message, the Ethernet switch searching the CAM table with

the MAC address corresponding to the address of the multicast group; if the entry corresponding with the address is found, the Ethernet switch obtaining the port number of the host via searching in the CAM table with the vlan ID in the HGMP Join message, and then adding the port number into the said entry; if nothing is found, adding an entry in the CAM table, which comprises the MAC address corresponding to the multicast address, the port number of the host which applies to join in the multicast group, and the port number of the multicast router connected with the Ethernet switch;

after receiving the HGMP Leave message, the Ethernet switch obtaining the entry through looking up the CAM table with the MAC address corresponding to the multicast address of the multicast group, and getting the port number of the host through searching with the vlan ID, and then deleting the said port number from the said entry, if the said port number is the solely port of the said entry, deleting the whole entry;

the step of forwarding of the multicast flow comprises,

(6) when receiving the multicast flow sent from the multicast source, the multicast router forwarding the multicast flow to an egress based on a CAM table; when handling the IGMP Membership Report message of the host, the multicast router creating a multicast forwarding egress according to the real port of the Ethernet switch, and sending only one copy of the multicast flow to the Ethernet switch;

the step of the host leaving the multicast group comprises,

(7) after finishing the multicast and wanting to leave the multicast group, the host sending an IGMP Leave message; after receiving the IGMP Leave message, the multicast router extracting the vlan ID from the message, and obtaining corresponding entry via searching in the multicast access privilege table created in step (1) with the vlan ID, then deleting the address of the multicast group indicated by the IGMP Leave message in the entry; after completing a routine disposal on leave messages; the multicast router generating the HGMP Leave message and sending to the Ethernet switch, which includes the vlan ID of the host which wants to leave group, the address of multicast group where the host wants to leave and a Leave command field.

5. The method according to claim 3, wherein the CAM table and the unicast forwarding table of the Ethernet switch are shared.

6. The method according to claim 3, wherein, during the messages forwarding, adopting a vlan protocol between the port of the multicast router and the Ethernet switch. 5
7. The method according to claim 3, in step (6) there is no vlan ID in a multicast data packet of the multicast flow sent from the multicast router. 10
8. The method according to claim 3, in step (7) of leaving from the multicast group can also be implemented via following means which comprises, once the multicast router knows offline status of the user, the multicast router actively sending the IGMP Leave message to terminate multicast flow transmission to the host, which is same with that of processing on the IGMP Leave message. 15
9. The method according to claim 3, further comprises controlling the multicast sender, which includes when the host transmits data to the multicast group, the first receiver among the multicast routers filtering the data message with a multicast Access Control List (ACL), and forwarding the data message that satisfies the requirements in the ACL to the multicast tree. 20
10. The method according to claim 9, wherein the multicast ACL comprises a command word, a source address and a group address. 25
11. The method according to claim 9, wherein the multicast ACL is distributed to each multicast router by a centralized multicast service control server; the step of controlling the sender is accomplished with the multicast ACL by the multicast router, meanwhile the multicast service control server is also acts as the AAA server. 30
12. The method according to claim 9 or claim 11, wherein the multicast ACL can also be distributed by a centralized policy server or a network manager. 35
- 40
- 45
- 50
- 55

Ver.	Type	Reserved	Count
GDA			
GDA		USA	
USA			

Fig. 1

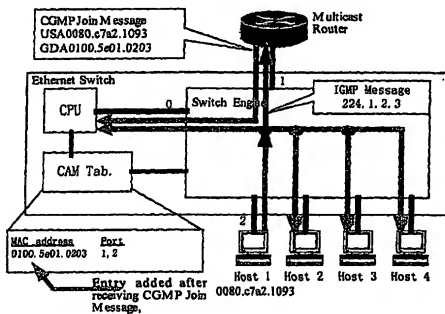


Fig. 2

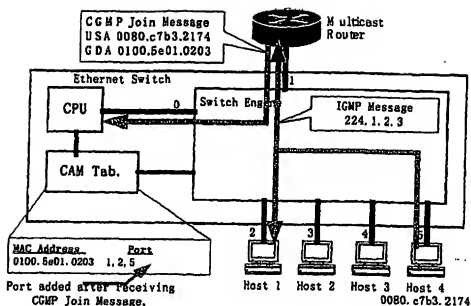


Fig. 3




Fig. 4

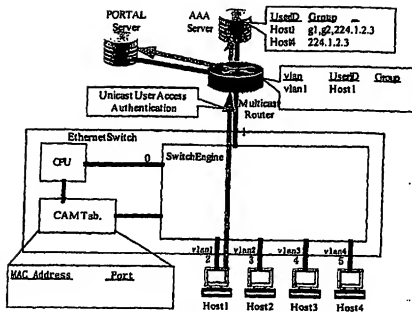


Fig. 5

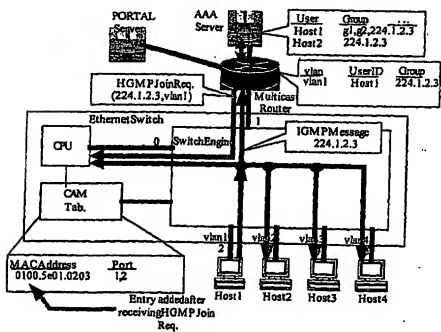


Fig. 6

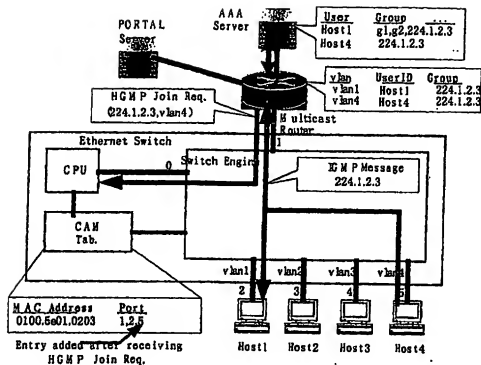


Fig. 7

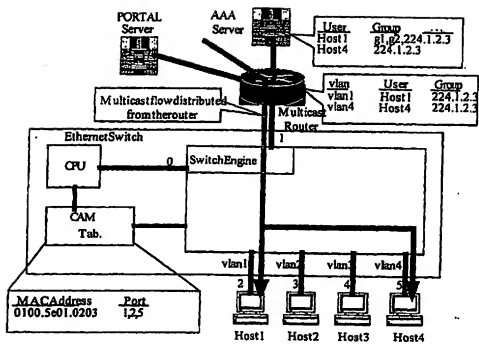


Fig. 8

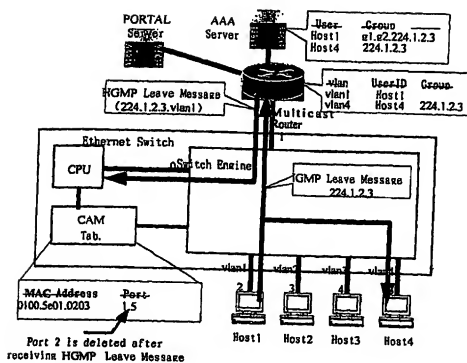


Fig. 9

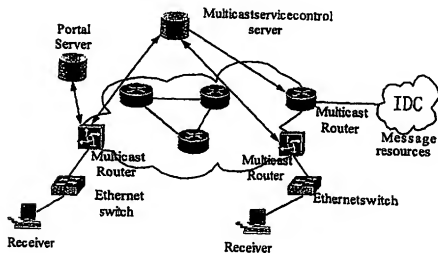


Fig. 10

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN02/00596

A. CLASSIFICATION OF SUBJECT MATTER

IPC²: H04L29/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC³: G06F15/16 H04L12/00 H04L29/06

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPL, EPODOC, PAJ, CNPAT

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US6275859 B1 ((SUNM) SUN MICROSYSTEMS INC) 14.8 月.2001 (14.08.01) See whole document	1-12
A	WO0062480 A ((NBL) NORTEL NETWORKS INC) 19.10 月.2000 (19.10.00) See whole document	1-12
A	EP0887982 A2 ((SUNM) SUN MICROSYSTEMS INC) 30.12 月.1998 (30.12.1998) See whole document	1-12

☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim (S) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
12.Dec.2002

Date of mailing of the international search report

30 JAN 2003

30.01.03

Name and mailing address of the ISA/CN
6 Xizheng Rd., Jinan Bridge, Heiliao District,
100080 Beijing, China
Facsimile No. 86-10-62019451

Authorized officer

ZHU qi

Telephone No. 86-10-62093361



Form PCT/ISA/210 (second sheet) (July 1998)

INTERNATIONAL SEARCH REPORT
 Information patent family members

Search request No.

PCT/CN 02/00596

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US6275859 B1	14.8.2001	WO0131470 A1	03.05.2001
		AU6772700 A	08.05.2001
WO0062480 A	19.10.2000	AU4458800 A2	14.11.2000
EP0887982 A2	30.12.1998	US6330671 B1	11.12.2001
		CA2241701 A	23.12.1998
		JP11095658 A	09.04.1999

Form PCT/ISA/210 (extra sheet) (July 1998)